



PERFECT FINISH PAINTED BY THE SPECIALIST.

# BAROLL 110P and 220P

## Hose retractor for manual painting installations





### Range of Application

- Clearcoat, metallic paint
- Water based paint
- Primer
- Hardener
- Spraying air, ventilating air
- Thinner
- Solvent agents

### Features

- Maintenance friendly through easy change of gasket. Hose can be changed without disassembling the casing because access is possible through the casing.
- Stepless unrolling
- Pneumatically non-reverse ratchet
- Light metal hose drum
- Easy change of gaskets

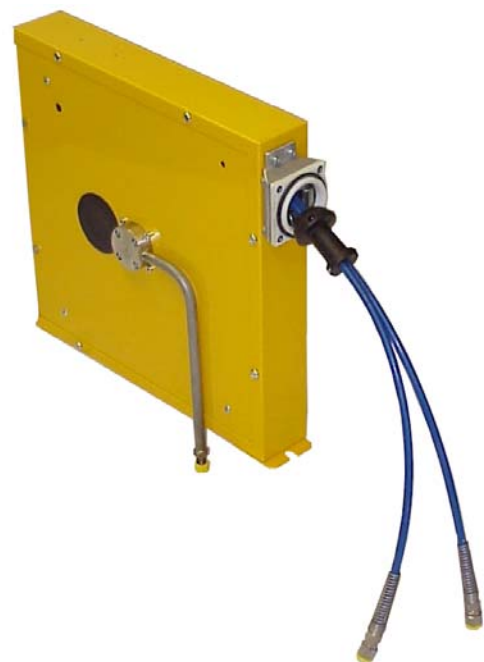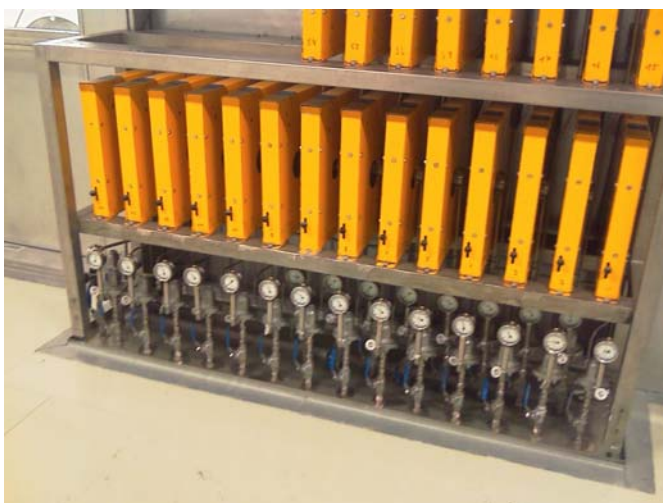



PERFECT FINISH PAINTED BY THE SPECIALIST.

## Technical Data

### Hose retractor BAROLL 110P and 220P

Dimensions	BAROLL 110P: BAROLL 220P:	450 x 450 x 80 mm width 450 x 450 x 115 mm width
Attachment	in front: behind:	countersunk screw M 8 x 12 socket head cap screw M10 x 12
Type of mounting:		standing on console
Hose outlet:		optionally top or bottom
Hose extraction:		through friction brake
Hose length:		up to 8 m extensible (standard)
Medium feed:		stainless steel pipe 1/4" – 3 x 90° swivelling
Hose coupling:		hose liner, R3/8" (standard) or design according to customer's order
Hose quality	paint: hardener:	6/8 PA; 6,3/10,2 PA/PU; 6,4/12,7 4/8 inner cone Teflon PA welded design when hose has two channels
Wall entrance:		ø 70mm with sealing washer, Viton
Hose retraction:		with pneumatic interlock of brake with hand- or foot-operated button
Compressed air required:		approx. 3ccm/stroke
Pressure:		5 bar
Pneumatic hose		ø 4 x 1 or 6 x 1
Accessory	BAROLL 110P: BAROLL 220P:	hose coupling for gun, connection stainless steel with anti-kink spiral distributor made of stainless steel with adjustable paint pressure regulator

All material coming into contact with paint, is made of stainless steel 1.4301, 1.4305, 1.4571 or PTFE, POM silicon-free