




PERFECT FINISH – PAINTED BY THE SPECIALIST.

# Agitation Station

## for 200 litre and 120 litre container with clamping lid

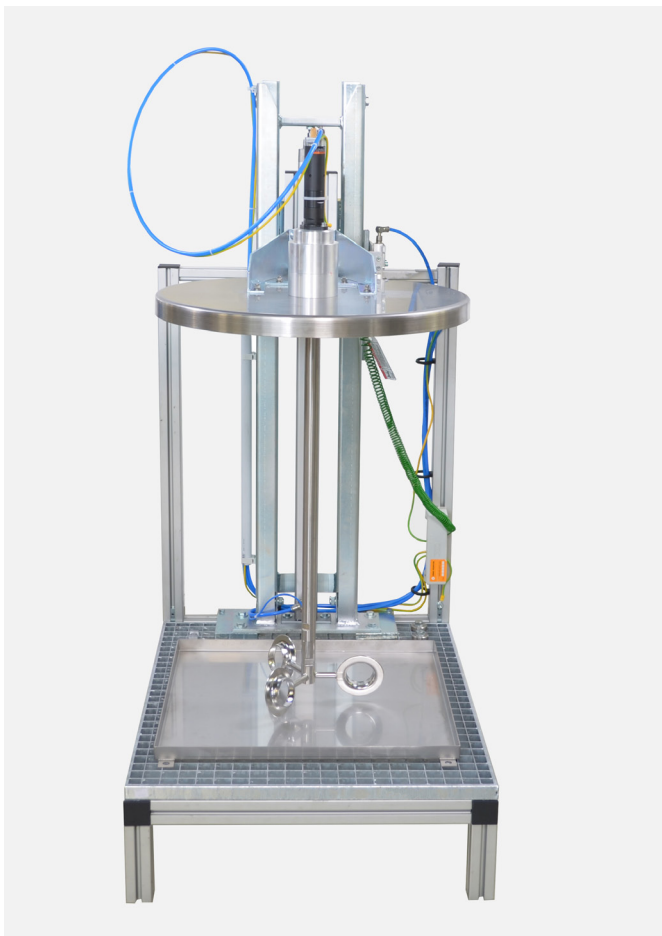

Agitation station for 200 litre and 120 litre container with clamping lid



Agitation station for 200 litre and 120 litre container with clamping lid with timer control for the setting of the agitating time (option)

### Functional Description

The agitation station is mounted on an aluminium frame as a compact unit and is designed for the use in painting installations. All parts that come in contact with the medium are made of stainless steel. A constant speed is reached through the compressed air motor with gear box, which prevents the development of foam.

### Features

- Constant speed prevents development of foam
- Single earthing of components acc. to DIN EN 50310
- User friendly mounted on aluminium frame



PERFECT FINISH – PAINTED BY THE SPECIALIST.

## Technical Data

### Agitation station for 200 litre and 120 litre container with clamping lid

p compressed air supply:	6 - 8 bar
Max. speed gear agitator:	240 rpm
Connection compressed air supply:	Hose liner LW 9
Space requirements (w/d/h):	700/900/2500 mm
Max. viscosity of the to be used painting material:	60 sec., DIN 6 mm

## Essential Components

- Lifting unit 1000 mm stroke with 3-way control valve up/stop/down
- Container lid with rim (ø 625) made of stainless steel for 200l and 120l container with clamping lid
- Pneumatic gear agitator 0,5 kW, with possibility to throttle and blade agitator made of stainless steel
- Compressed air connection with isolating ball valve
- Earthing bar and earthing material
- Mounting stockade of aluminium profile and grate
- Collecting pan constructed as dripping pan