





PERFECT FINISH – PAINTED BY THE SPECIALIST.

Agitation Station for 30 litre Hobbock

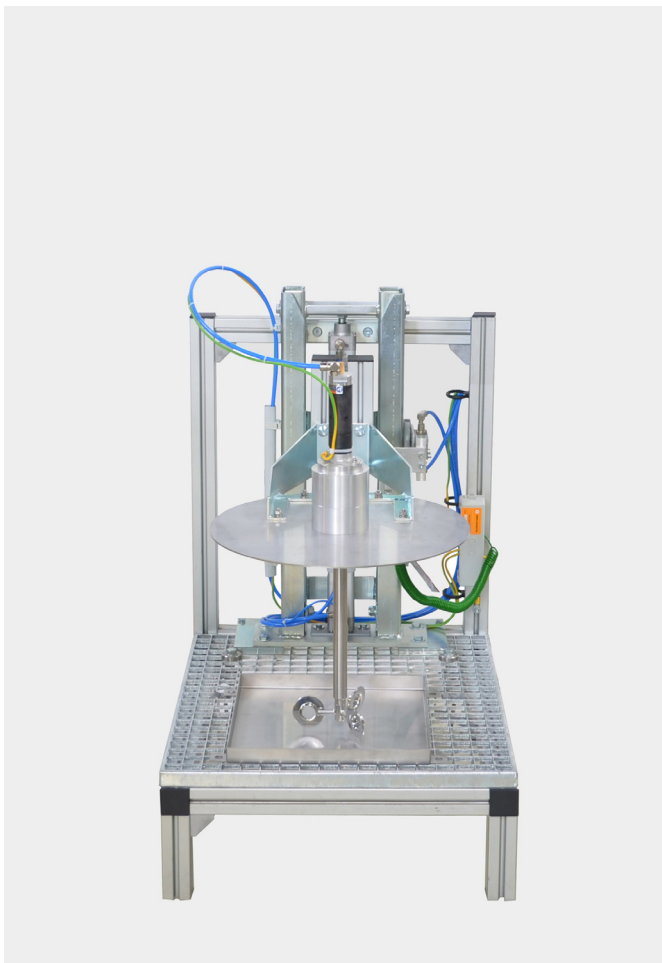

Agitator station for 30l Hobbock

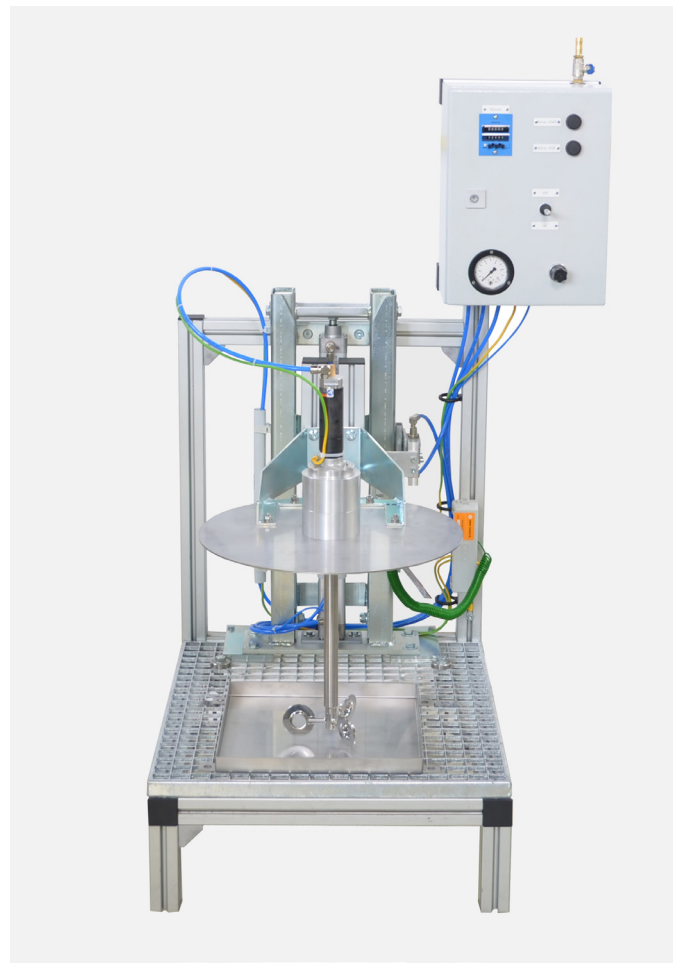

Agitator station for 30l Hobbock with timer control for the setting of the agitating time (option)

Functional Description

The agitation station is mounted on an aluminium frame as a compact unit and is designed for the use in painting installations. All parts that come in contact with the medium are made of stainless steel. A constant speed is reached through the compressed air motor with gear box, which prevents the development of foam.

Features

- Constant speed prevents development of foam
- Single earthing of components acc. to DIN EN 50310
- User friendly mounted on aluminium frame



PERFECT FINISH – PAINTED BY THE SPECIALIST.

Technical Data

Agitation station for 30 litre hobbock

p compressed air supply:	6 - 8 bar
Max. speed gear agitator:	240 rpm
Connection compressed air supply:	Hose liner LW 9
Space requirements (w/d/h):	610/750/1500 mm
Max. viscosity of the to be used painting material:	120 sec., DIN 6 mm

Essential Components

- Lifting unit 500 mm stroke with 3-way control valve up/stop/down
- Container lid with rim (ø 450) made of stainless steel for Euro hobbocks
- Pneumatic gear agitator 0,5 kW, with possibility to throttle and blade agitator made of stainless steel
- Compressed air connection with isolating ball valve
- Earthing bar and earthing material
- Mounting stockade of aluminium profile and grate
- Collecting pan constructed as dripping pan