


PERFECT FINISH – PAINTED BY THE SPECIALIST.

Spray Gun Flush Box

Gun rest suitable for manual spray guns

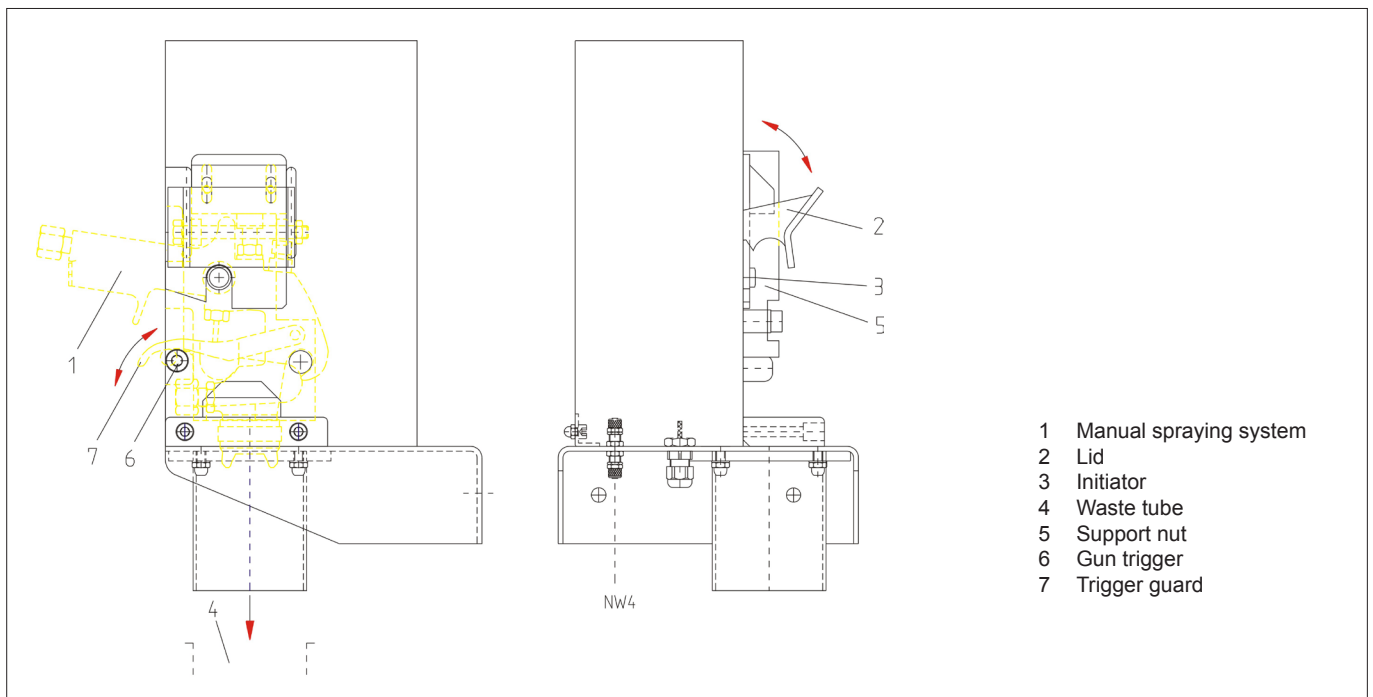

The spray gun flush box can be used as gun holder for manual spray guns used during flushing or colour changing as well as a holder during production stops.

The spray gun flush box consists mainly of holder, lock unit and fixing device for the manual spray gun. The material is flushed through a tubing into dedicated waste material containers.

With a mechanical code – spray gun/gun flush box – it is possible to assign a dedicated flush box spray gun combination.





PERFECT FINISH – PAINTED BY THE SPECIALIST.

Technical Data

Spray Gun Flush Box

Control air connection:	2 x NW 4 (4 x 1)
Input air pressure:	max. 8 bar min. 5 bar
Admissible environment temperature:	max. 45°C
Electrical control initiators:	only intrinsically safe – Ex “i” Electrical connection for 2-wire proximity switch NAMUR according to DIN 19234 protection class “intrinsically safe”.
	Installation and barriers must fulfil the applicable regulations. DIN EN 50014/VDE 170/171, part 1/5.78 “General Conditions“ and DN EN 50020/VDE 170/171, part 7/5.78 “protection class intrinsically safe”.
Designed for:	all customary hand-spraying systems